




# 19" Open Frame

Our 19" Open Frame touch screen monitor offers an industrial surface acoustic wave (SAW) touch technology with USB & serial connectivity.

- ✓ Rugged metal chassis offering strong protection
- ✓ 100mm VESA Mounting
- ✓ 12V Powered
- ✓ USB, Serial, VGA & DVI-D
- ✓ SAW Touch for industrial applications
- ✓ Supports resolutions up to 1280 x 1024 Compatible with IBM VGA, VESA standards

## Detailed Specification

Model No	TS19LOSRTGE001
Case/Bezel Colour	Black
Display Type	5:4 Ratio 19"Active Matrix TFT LCD
Resolution	1280x1024@60Hz
Contrast Ratio	1000:1
Luminance (LCD Panel)	250cd/m
Synchronisation Range	30-80KHz horizontal,60-75Hz Vertical
Pixel Response Time	8ms
Colours	16.7million
Power Consumption	36W

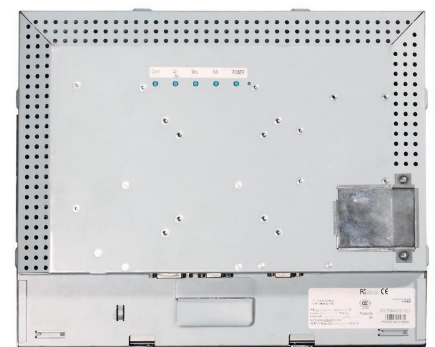



Power Supply	External:100-240 VAC, 50-60Hz
Glass Thickness	4mm
Input Video Signal Connector	VGA / DVI-D
Backlight Lamp Life	50,000
Viewing Angle (CR≥10) - Horizontal (left/right) Typ.	160°(80°/80°)
Viewing Angle (CR≥10) - Vertical (up/down) Typ.	160°(80°/80°)
Temperature Range	Operating: 0C-40C, Storage: -20C -60C
Relative Humidity	Operating: 20% - 80%, Storage: 10% - 90%
VESA Mount	100mm
Dimensions	436.96mm×364.96mm×54.31mm
Weight	4.6kg
Warranty	3years*
Agency Approvals	FCC, CE



### Detailed Drawings

